

April 22, 2013

**STRUCTURAL CERTIFICATE**

This is to certify that BSC has examined the components and procedures specified in the EzQuik Model V2 Ground Mounting System GMS-V2 Installation Manual.


The physical components and fixings were found to be structurally adequate and in accordance with AS1170.1 (2002) and AS1170.2 (2011).

The earth auger is excluded from this certification.

The footing sizes tabulated in the Manual are not correct for uplift on the system.

The following footing sizes are recommended.

WIND ZONE		A	B	C	D
WIND SPEED $V_p$ (m/s)		41	48	59	73
FOUNDATION SIZES	FRONT	300x300x300	300x300x300	300x300x300	300x300x300
	REAR	650x650x650	700x700x700	700x700x700	700x700x800
CONCRETE VOLUME	FRONT	0.027m <sup>3</sup>	0.027m <sup>3</sup>	0.027m <sup>3</sup>	0.027m <sup>3</sup>
	REAR	0.270m <sup>3</sup>	0.343m <sup>3</sup>	0.355m <sup>3</sup>	0.389m <sup>3</sup>

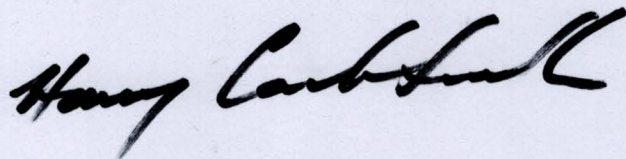

Harry Carlin-Smith FIEAust CPEng  
Managing Director